
Columbus and Alumin Usage and Maintenance instructions

Ladder usage.

Stand behind the hatch when lowering your ladder from the ceiling.
Stand at the front of the ladder when unfolding.


Hold the tread or use operating rod and loop (1) to lower ladder.

Do not allow your hand to remain within the scissor action arms.

Always face the ladder while climbing up or down

Do not use the ladder arm as a hold while climbing the ladder

Use the ladder hand rail to increase your stability wherever possible

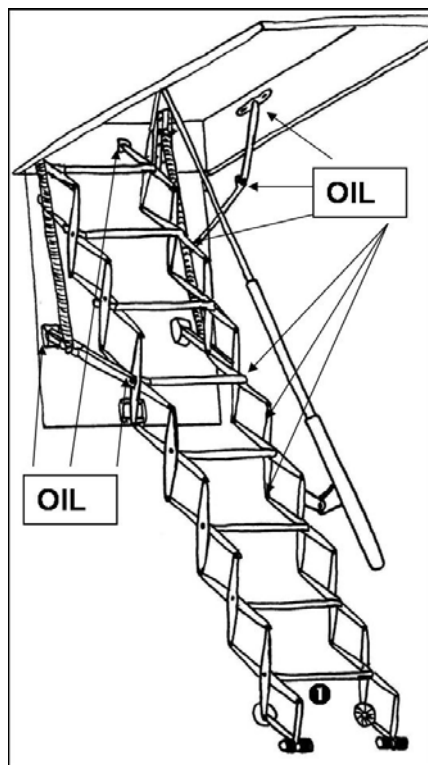

Maintenance

Check all nuts bolts and fastenings for tightness every 50 operations.

Important:

Do not allow the lid of your ladder to slam as this may cause damage and void your warranty

Lubrication

Apply light machine oil (sewing machine oil) to all moving parts as shown in the diagram

Do not use kerosene based oil sprays such as WD40